



# MG102i



**BPG Radiocomunicazioni Srl**  
Via Nazionale, 13  
10060 Pinasca TO - Italy  
Tel. +390121800669  
commerciale@bpg.it - www.bpg.it

## General

**MG102i** wireless router securely and wirelessly connects two private networks/sites (e.g. Remote LAN and company Intranet) via public mobile networks and the Internet. The benefits of such Virtual Private Networks (VPN) are flexibility, security, cost-effectiveness and convenience.

The MG102i is a GPRS/EDGE/UMTS/HSPA+/LTE router and enables fast and secure data transmission between two sites. For the establishment of Virtual Private Networks (VPN) two different technologies are supported: IPsec and OpenVPN. For simple applications the use of Dynamic DNS or fixed IP addressing can replace the need of a VPN.

Multiple devices can directly be attached to the MG102i thanks to the integrated 5 port Ethernet switch. The dual SIM/dual module feature guarantees best availability of network connections. MG102i Software is based on well proven components including an Embedded Linux operating system and standard communication protocols.

The MG102i is a new product that extends HW and SW functionality of previous MG102 and is fully SW compatible with MIDGE routers.


The addressed **SCADA and telemetry serial protocols** can be efficiently used over GSM networks. The MG102 Terminal server can communicate with a RACOM central device equipped with serial protocols, e.g. a RipEX. A hybrid network, where individual RTUs are connected either via MG102 (GSM) or via RipEX (UHF radio) to the same centre, is possible as well.

## Wireless router

- LTE,HSPA+,UMTS,EDGE,GPRS
- 5 port Ethernet switch / router
- 2x SIM / twin module available
- Extended temperature range
- Vibration and shock hardened
- Extended input voltage range
- GPS receiver with NTP server
- SDK - software development kit

## Applications

- SCADA & Telemetry
- Points of Sale, ATMs
- Security and Surveillance
- Land line backup
- Transportation

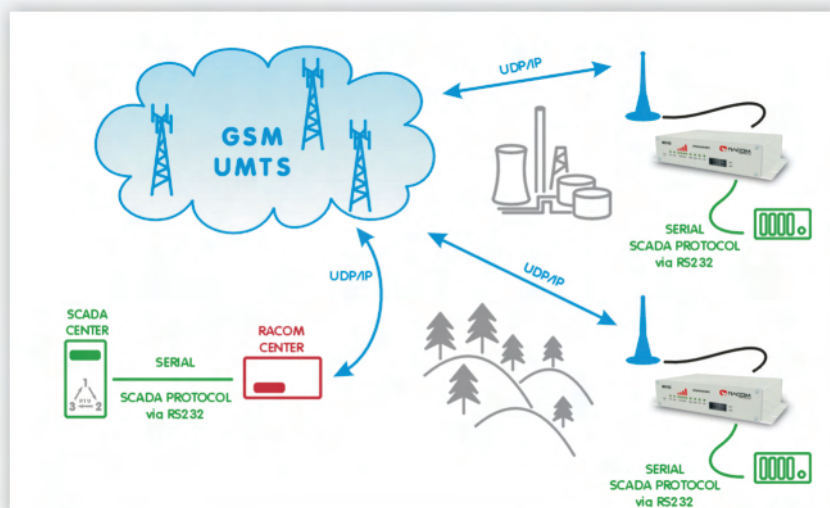

# Technical parameters

## Mobile Interface Parameters

UMTS	Multimode HSDPA, HSUPA, UMTS, EDGE, GPRS and GSM 3G-UMTS, HSDPA, HSUPA, UMTS: 850/900/1900/2100 MHz 2G-EDGE, GPRS, GSM: 850/900/1800/1900 MHz Data rates: max. 7.2 Mbps downlink / 5.76 Mbps uplink
LTE	Multimode LTE, HSPA+, UMTS, EDGE, GPRS, GSM 4G-LTE: 800/900/1800/2100/2600 MHz 3G-UMTS/HSPA+: 900/2100 MHz 2G-GSM/GPRS/EDGE: 900/1800/1900 MHz Data rates up to 100 Mbps downlink / 50 Mbps uplink

## Services /Networking

DHCP server, DNS proxy server, DNS update agent
Telnet server, SSH server, Web server
NTP server with GPS time
COM server, Modbus gateway
Port Forwarding
Fallback Management
Connection supervision
Automatic connection recovery
OpenVPN, IPsec, PPTP
Firewall, Access Control Lists, NAPT
SDK - programmable scripts
Redundancy
Voice gateway

## Environmental

Temperature range:	UMTS: -25 to +70°C (-13 to +158°F) LTE: -25 to +60°C (-13 to +140°F)
Humidity:	0 to 95% non condensing
IP 40 with SIM and USB covers	
Vibration and shock hardening	

## Power supply

Input voltage:	12 - 48 V DC (-15% / +20%)
Max. power consumption:	5 W / 10 W (2 module unit)

## Interfaces

5 port Ethernet switch 10/100 Base-T, Auto MDX, 5xRJ45 connector
RS232 DCE interface, 3 pin
GSM Antenna 50 Ohm, SMA connector
GPS Passive / Active Antenna, SMA connector
USB Host
Digital I/O: 2xDI, 2xDO, 13 pin terminal block
WLAN / WiFi - IEEE 802.11 b,g,n
Access point or client, one or two antennas

## Mechanical

Casing:	Metal
Dimensions:	195 W x 104 D x 40 H mm (7.68 x 4.09 x 1.57 in)
Weight :	560 g (1.23 lbs)

## Diagnostics and Management

Web interface, CLI available
File configuration
OTA SW update
Advanced troubleshooting
SMS remote control, SMS and E-mail notification
SNMP v1, v2c, v3

## Types and codes

MG102i	UMTS module	LTE module	WiFi	GPS key	Server Ext. key	Mobile IP key	Voice key
MG102i-U	✓	✗	✗	⊖	⊖	⊖	⊖
MG102i-L	✗	✓	✗	⊖	⊖	⊖	⊖
MG102i-UW	*	✗	✓	⊖	⊖	⊖	⊖
MG102i-2UW-G	* twin	✗	✓	⊖	⊖	⊖	⊖
MG102i-LW-G	*	✓	✓	⊖	⊖	⊖	⊖

\* option

## Approvals

CE, FCC
---------

The screenshot displays the RACOM MG102 web management interface. The top navigation bar includes links for HOME, INTERFACES, ROUTING, FIREWALL, VPN, SERVICES, SYSTEM, and LOGOUT. The main content area is divided into several sections:

- COM Server / Gateway:** A sidebar menu with options like Connection Supervisor Administration, Ping Monitor Configuration, DHCP Server, DNS Proxy Server, Dynamic DNS Client, E-mail Client, Event Manager, SMS, SSH Server, SNMP Agent, Telnet Server, UDP Message Receiver, USSD, Web Server, and Captive Portal.
- COM Server Administration:** Shows the COM server status as 'enabled'.
- COM Server Configuration:** Allows setting protocols on IP and COM ports.
- TCP Configuration:** Shows port settings, with a warning: "01/01/07 00:09 Sim1: A permanent connection is disabled."
- Profile and Fallback Management:** A detailed configuration page for SIM profiles, including fields for SIM used, phone number, user name, password, access point name, authentication method, and various compression options.

The footer contains the RACOM company information: RACOM s.r.o. • Mirova 1283 • 592 31 Nove Mesto na Morave • Czech Republic • Tel: +420 565 659 511 • E-mail: racom@racom.eu • www.racom.eu